

KGS SPEEDLINE® ORG

**FLOOR POLISHING
HAND MACHINES**

KGS Speedline® ORG Floor Technology

The original standard in stone and concrete polishing industries. Excellent in quality and performance. This KGS technology is exceptional for dry polishing of non coloured concrete where its dark coloured resin leaves a natural concrete coloured finish. The KGS Speedline® ORG diameter 125 mm is the ideal size for edge polishing of floors allowing access under pipes and around obstacles.

MACHINES


Angle grinder; best results are achieved at 3,000-4,000 rpm.

WORKABLE MATERIALS

Wet on natural stone and dry on concrete

KEY BENEFITS

- Excellent quality and performance
- Leaves a natural concrete coloured finish
- Ideal size for edge polishing of floors

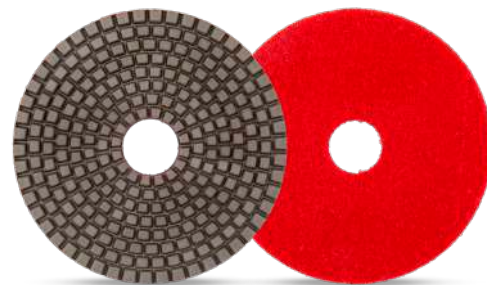

PRODUCT INFORMATION

Bond: Resin bonded diamond

Diamond height: 2,5 mm

Backing: Velcro® (QRS)

Dimension: 125 mm

AVAILABLE GRIT SIZES

Grit	60	120	200	400	800	1500	3000	100000
Art. no.	28475	28476	28477	28478	17895	17896	17897	17898

📦 1 pcs.

POLISH LEVELS

Gloss	Final grit
Matt closed	200
Silky	400
Low gloss	800
Medium gloss	1500
High gloss	3000

KGS BACK-UP PADS QRS M14

Back-up pad with velcro connection. Ideal for the KGS Speedline® ORG polishing discs. The micro hook ensuring strong pad adhesion. There is a hole for center water feed. The back-up pad is also available with 20 mm industrial foam, for a softer grind.

Type	Ø	Art. no.
M14	125 mm	41187
M14 with 20 mm extra foam	125 mm	41192

📦 1 pcs.

